


# FS-24-26-RGB+W-2700

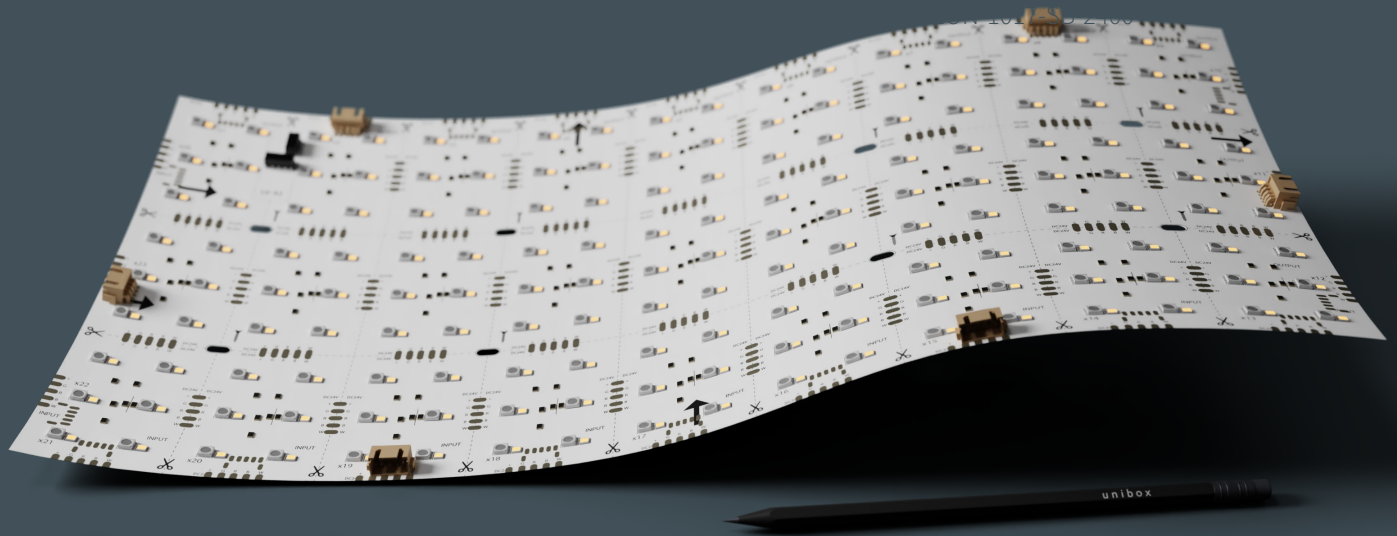

## Product Specifications:

|                    |                                     |
|--------------------|-------------------------------------|
| Product Range      | Flexible Sheet                      |
| LED Strip Type     | RGB+W                               |
| LED Pitch          | 26.7 mm x 26.7 mm                   |
| LED's per metre    | 324                                 |
| LED Cut Point      | 53.3 mm x 80 mm                     |
| Dimensions         | 480 mm x 240 mm x 7 mm (Sheet size) |
| Colour Temperature | RGB+W (2700K)                       |
| Lifetime           | Up to 26300 hours                   |
| Mounting Method    | 3M™ VHB Tape                        |

## Product Performance: (Based on 1000mm)

|                        |                                    |        |        |             |
|------------------------|------------------------------------|--------|--------|-------------|
| Voltage                | 24 V                               |        |        |             |
| Power Consumption      | 25.92 W                            |        |        |             |
| Power Split            | Red                                | Green  | Blue   | White 2700K |
|                        | 6.48 W                             | 6.48 W | 6.48 W | 6.48 W      |
| Lumen Output           | 1300 lumens                        |        |        |             |
| Lumen Split            | Red                                | Green  | Blue   | White 2700K |
|                        | 190 lm                             | 550 lm | 115 lm | 570 lm      |
| Lumen Efficiency       | 50.15 lumens / W                   |        |        |             |
| Maximum Continuous Run | 4 sheets                           |        |        |             |
| IP Rating              | IP 20 (Other IP ratings available) |        |        |             |
| CRI                    | 90+ Ra (95+ Ra available)          |        |        |             |
| Colour Binning Step    | 3 SCDM (2 SCDM available)          |        |        |             |
| LED Beam Angle         | 120 °                              |        |        |             |
| Operating Temperature  | -20°C ~ +60°C                      |        |        |             |

## Product Dimensions: (Units in mm)

