


U-NEON-1220-SB-12-WN

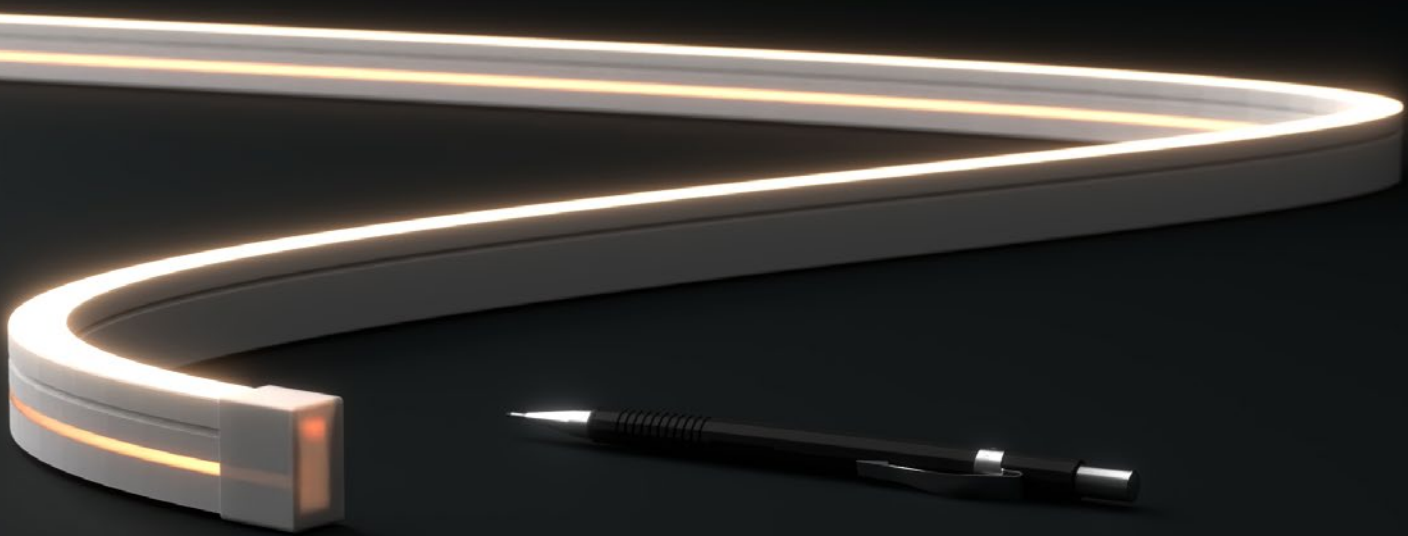


Product Specifications:

Product Range	Neon Flex
LED Strip Type	Colour Tuneable White
LED Pitch	8.33 mm
LED's per metre	112
LED Cut Point	125 mm
Dimensions	12 mm x 20 mm x 5.05 m (Reel length)
Colour Temperature	6500 K
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: (Based on 1000mm)


Voltage	24 V	
Power Consumption	12 W	
Power Split	Warm White	Cool White
	6 W	6 W
Lumen Output	340 lm	
Lumen Split	Warm White (2200K)	Cool White (6500K)
	160 lm	180 lm
Lumen Efficiency	28 lm / W	
Maximum Continuous Run (Powered from one end)	5 m	
IP Rating	IP 65 (IP 67 available)	
CRI (Ra)	90+	
Colour Binning Step	3 SCDM (2 SCDM available)	
Operating Temperature	-20°C ~ +50°C	

Product Dimensions: (Units in mm)

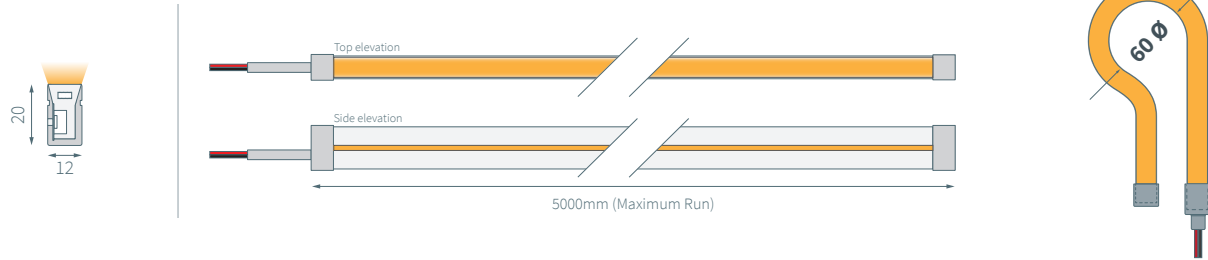


End Cap:


Standard End Cap



In-Line
U-NEON-1220-SEC-IL




Side Exit
U-NEON-1220-SEC-SE




Bottom Exit
U-NEON-1220-SEC-BE


Moulded End Cap



In-Line
U-NEON-1220-MEC-IL




Side Exit
U-NEON-1220-MEC-SE




Bottom Exit
U-NEON-1220-MEC-BE

Injection Moulded End Cap




Side Exit
U-NEON-1220-IMEC-SE




Bottom Exit
U-NEON-1220-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1220-ALP1M



Aluminium profile - 2M
U-NEON-1220-ALP1M

Brackets



Bracket
U-NEON-1220-BRK

Flexible Track



Flexible Track - 0.5m
U-NEON-1220-FT



Flexible Track - 1m
U-NEON-1220-FT

Polar Curve / Photometric Data:

