


U-NEON-1616-TB-19-WN




Product Specifications:

Product Range	Neon Flex
LED Strip Type	Colour Tuneable White
LED Pitch	4.16 mm
LED's per metre	240
LED Cut Point	50 mm
Dimensions	16 mm x 16 mm x 5.05 m (Reel length)
Colour Temperature	2200K - 6500K
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: (Based on 1000mm)


Voltage	24 V	
Power Consumption	19 W	
Power Split	Warm White	Cool White
	9.5 W	9.5 W
Lumen Output	990 lm	
Lumen Split	Warm White (2200K)	Cool White (6500K)
	450 lm	540 lm
Lumen Efficiency	62 lm / W	
Maximum Continuous Run (Powered from one end)	5 m	
IP Rating	IP 65 (IP 67 available)	
CRI (Ra)	90+	
Colour Binning Step	3 SCDM (2 SCDM available)	
Operating Temperature	-20°C ~ +50°C	

Product Dimensions: (Units in mm)

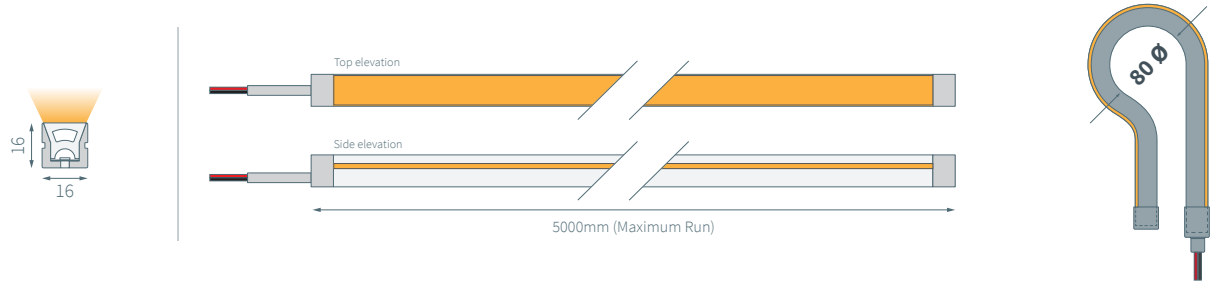

End Cap:

Standard End Cap

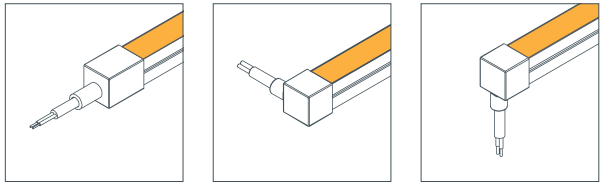


In-Line
U-NEON-1616-SEC-IL

Side Exit
U-NEON-1616-SEC-SE

Bottom Exit
U-NEON-1616-SEC-BE

Moulded End Cap

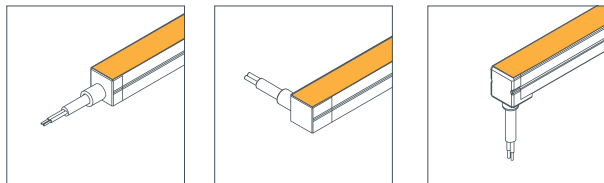


In-Line
U-NEON-1616-MEC-IL

Side Exit
U-NEON-1616-MEC-SE

Bottom Exit
U-NEON-1616-MEC-BE

Injection Moulded End Cap



In-Line
U-NEON-1616-IMEC-IL

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1616-ALP1M

Aluminium profile - 2M
U-NEON-1616-ALP1M

Brackets



Bracket
U-NEON-1616-BRK

Polar Curve / Photometric Data:

