


Oscillaire

Unibox presents the **Oscillaire** — a blend of precision engineering and artistry. By combining meticulous craftsmanship with hand-formed light guide plates (LGPs), Unibox has created a striking line of luminaires that redefine modern lighting.




Profile (mm)

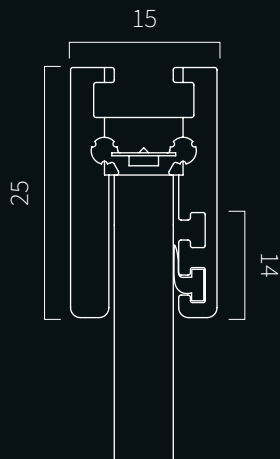

Mounting Methods



Suspended



Surface




Wall Mounted

Document Instructions

Digital users: Check selection boxes and fill in fields directly, save document as an *Interactive PDF* and submit to Unibox.


Manual users: Check selection boxes with a pen, scan ALL pages, save as an *Interactive PDF* and submit to Unibox.

Wave form




Brezza Leggera

Minimum warping of LGP



Burrasca Moderata

Moderate warping of LGP




Forte Burrasca

Maximum warping of LGP

LGP Size Index (mm)

Sizes based on blank LGP plate dimensions

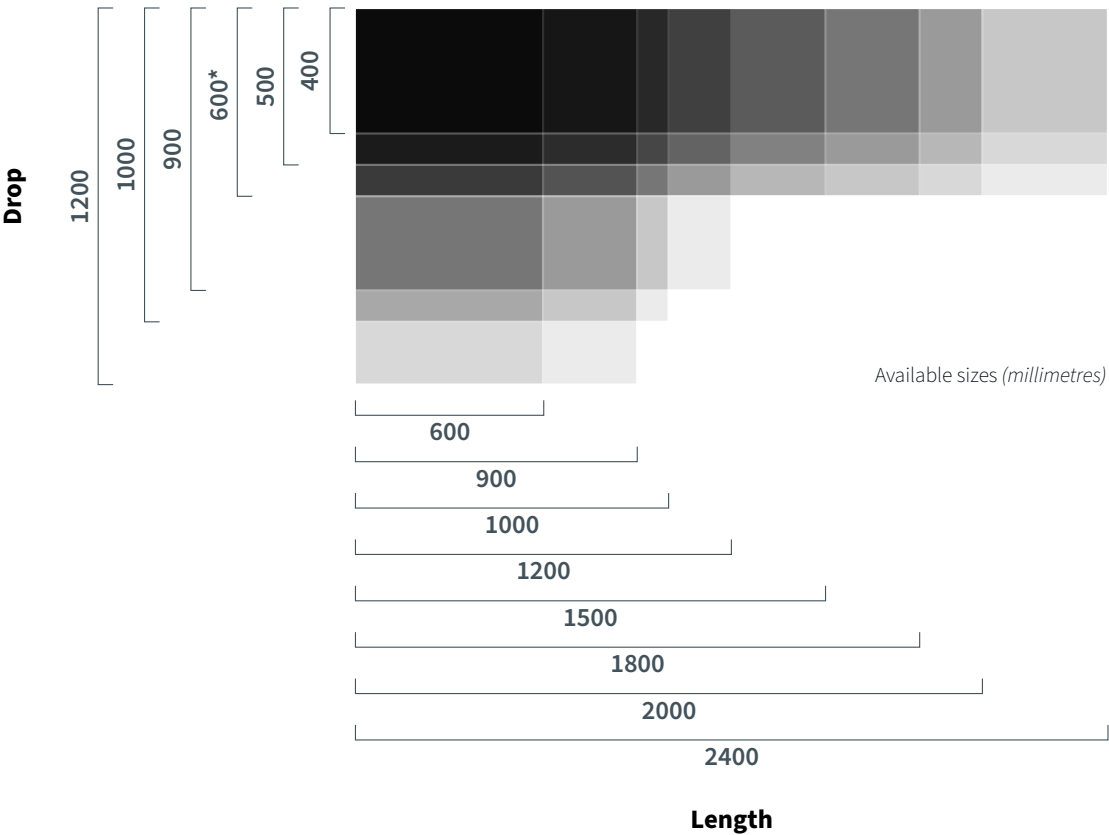

Refer to the diagram for compatible sizes

*Maximum **Wall Mounted** Projection

Dimensions (mm)

Select TWO

1. Length

- ☐ 600
- ☐ 900
- ☐ 1000
- ☐ 1200
- ☐ 1500
- ☐ 1800
- ☐ 2000
- ☐ 2400

2. Drop

- ☐ 400
- ☐ 500
- ☐ 600
- ☐ 900
- ☐ 1000
- ☐ 1200

Custom sizes available on request, contact a member of our team to discuss custom options.

3. Wave Form

Select ONE

- | | | | |
|--------------------------|----------|--------------------------|-------------------------|
| ☐ | 1 | Brezza Leggera | Minimum warping of LGP |
| ☐ | 2 | Burrasca Moderata | Moderate warping of LGP |
| ☐ | 3 | Forte Burrasca | Maximum warping of LGP |

Note each Oscillaire wave form is uniquely hand formed, each piece is individual.

4. LED

Select ONE

Temperature	Voltage	Power Consumption	Lm Output	LM Efficiency	CRI
☐ 2200K	24 V	14.4 W	1800 lumens	125 lumens / W	90+ Ra*
☐ 2400K	24 V	14.4 W	1886 lumens	131 lumens / W	90+ Ra*
☐ 2700K	24 V	14.4 W	1972 lumens	136.9 lumens / W	90+ Ra*
☐ 3000K	24 V	14.4 W	2016 lumens	140 lumens / W	90+ Ra*
☐ 4000K	24 V	14.4 W	2131 lumens	148 lumens / W	90+ Ra*
☐ 6500K	24 V	14.4 W	2160 lumens	150 lumens / W	90+ Ra*

Based on LED data

*95+ Ra available

5. Profile Finish

Select ONE

- | | | | |
|--|------------------------|--|-----------------|
| ☐  SSA | Satin Silver Anodised* | ☐  6028 | Pine Green |
| ☐  9005 | RAL Black | ☐  7015 | Slate Grey |
| ☐  9003 | White Powdercoat | ☐  7016 | Anthracite Grey |
| ☐  TB | Textured Black | ☐  9002 | Grey White |
| <i>Premium Finishes</i> | | ☐  GA | Gold Anodised |
| ☐  1003 | Signal Yellow | ☐  BA | Black Anodised |
| ☐  2003 | Pastel Orange | | |
| ☐  3028 | Pure Red | | |
| ☐  4007 | Purple Violet | | |
| ☐  5002 | Ultramarine Blue | | |
| ☐  5014 | Pigeon Blue | | |
| ☐  6000 | Patina Green | | |

*Standard Finish at no extra cost

6. Power Cable Finish

Select ONE

- ☐  **CLEAR*** Clear
- ☐  **BLK** Black
- ☐  **WHITE** White

Premium Braided

- ☐  **BLKBR** Black Braided
- ☐  **WHITEBR** White Braided
- ☐  **SILVERBR** Silver Braided
- ☐  **GLDBR** Gold Braided
- ☐  **ORGBR** Orange Braided
- ☐  **OTHER** Other

*Standard Finish at no extra cost

7. End Caps

Select ONE

- ☐  **9005** RAL Black
- ☐  **WHITE** White
- ☐  **SILVER** Silver

8. Fixing Method

Select ONE

- ☐  **S** Suspended*
- ☐  **C** Ceiling Mounted
- ☐  **W** Wall Mounted

*Max hanging drop 2.5m

9. Control

Select ONE

- ☐ **CASA** Casambi
- ☐ **DALI** DALI driver, dimming down to 1%
- ☐ **DMX** DMX driver, dimming down to 1%
- ☐ **1/10** 1/10V, dimming down to 1%
- ☐ **0/10** 0/10V, dimming down to 1%
- ☐ **NONDIM** Non-Dimming

Remote drivers please get in touch for max distances.

Product Code Builder

Use selected options for each section to build a custom code specific to your requirements.

	1	2	3	4	5	6	7	8	9
osc									

Please refer to your code above when contacting our team about your order



Get In Touch

+44(0)161 655 2100
info@unibox.co.uk
lighting.unibox.co.uk

HQ:

Greenside Way, Middleton, Manchester M24 1SW

