



U-NEON-1220-SB-15-6500

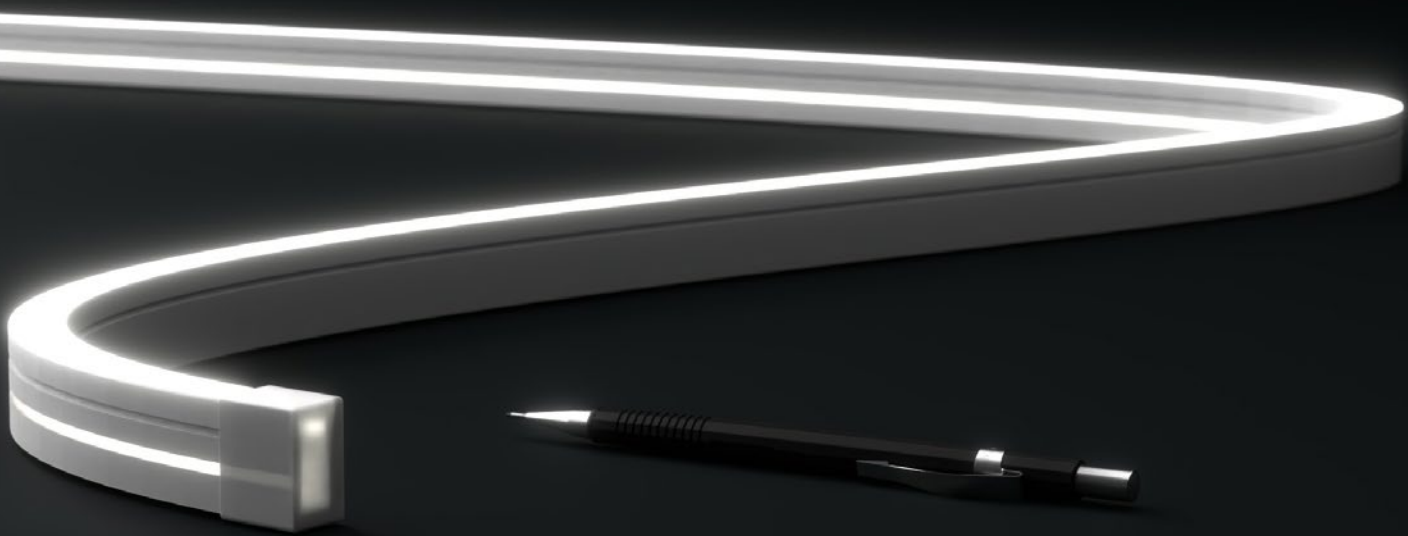


Product Specifications:

Product Range	Neon Flex
LED Strip Type	Fixed Colour White
LED Pitch	8.33 mm
LED's per metre	120
LED Cut Point	50 mm
Dimensions	12 mm x 20 mm x 5.05 m (Reel length)
Colour Temperature	6500 K
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: (Based on 1000mm)


Voltage	24 V
Power Consumption	15 W
Lumen Output	390 lm
Lumen Efficiency	26 lm / W
Maximum Continuous Run (Powered from one end)	5 m
IP Rating	IP 65 (IP 67 available)
CRI (Ra)	90+
Colour Binning Step	3 SCDM (2 SCDM available)
Operating Temperature	-20°C ~ +50°C

Product Dimensions: (Units in mm)

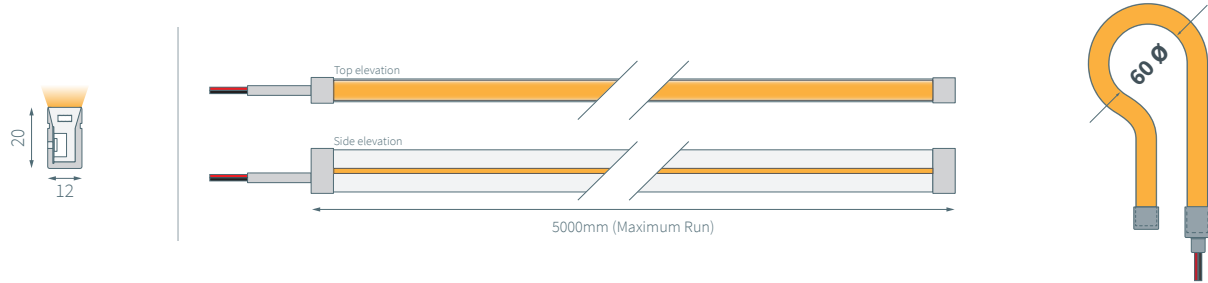

End Cap:

Standard End Cap

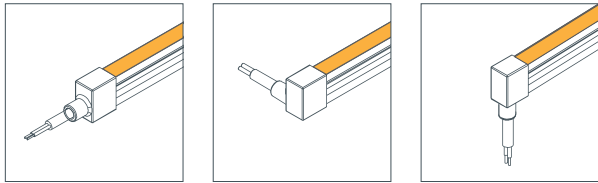


In-Line
U-NEON-1220-SEC-IL

Side Exit
U-NEON-1220-SEC-SE

Bottom Exit
U-NEON-1220-SEC-BE

Moulded End Cap

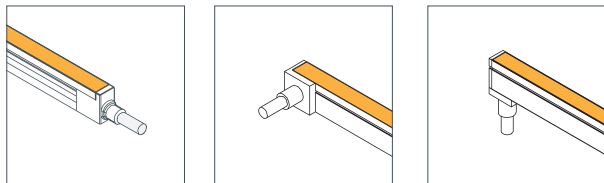


In-Line
U-NEON-1220-MEC-IL

Side Exit
U-NEON-1220-MEC-SE

Bottom Exit
U-NEON-1220-MEC-BE

Injection Moulded End Cap

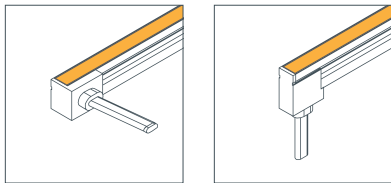

Side Exit
U-NEON-1220-IMEC-SE

Bottom Exit
U-NEON-1220-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1220-ALP1M


Aluminium profile - 2M
U-NEON-1220-ALP1M

Brackets



Bracket
U-NEON-1220-BRK

Flexible Track

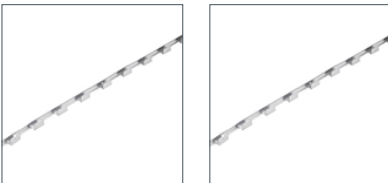

Flexible Track - 0.5m
U-NEON-1220-FT

Flexible Track - 1m
U-NEON-1220-FT

Polar Curve / Photometric Data:

