


U-NEON-0612-SB-10-RGB

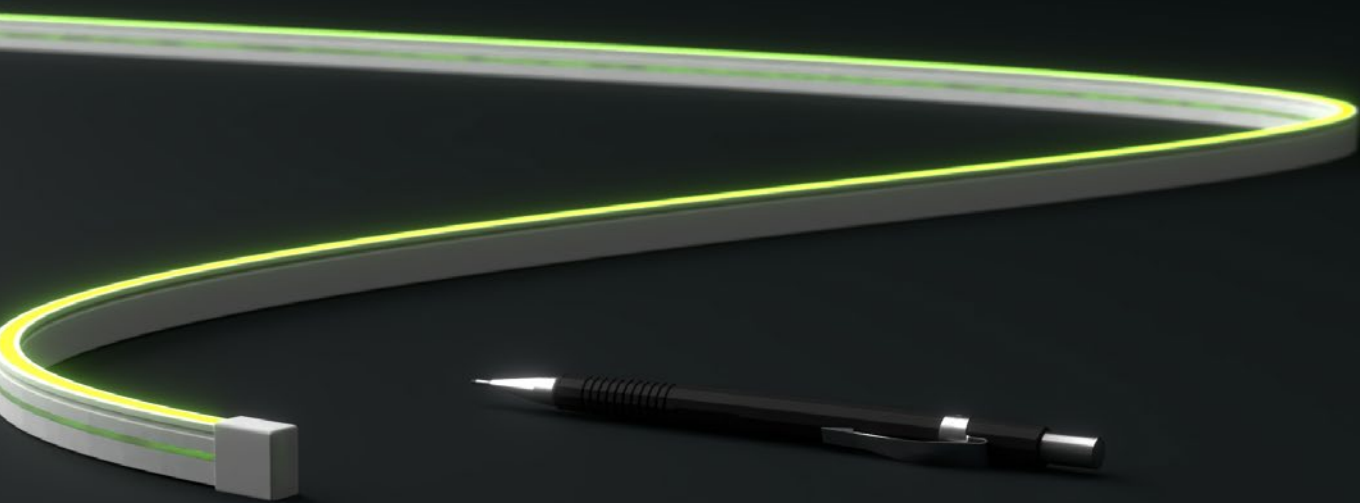


Product Specifications:

Product Range	Neon Flex
LED Strip Type	RGB
LED Pitch	8.33 mm
LED's per metre	120
LED Cut Point	50 mm
Dimensions	6 mm x 12 mm x 5.05 m <i>(Reel length)</i>
Colour Temperature	-
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: *(Based on 1000mm)*


Voltage	24 V		
Power Consumption	10 W		
Power Split	Red	Green	Blue
	3.3 W	3.3 W	3.3 W
Lumen Output	158 lm		
Lumen Split	Red	Green	Blue
	36 lm	100 lm	22 lm
Lumen Efficiency	16 lm / W		
Maximum Continuous Run <i>(Powered from one end)</i>	5 m		
IP Rating	IP 65 <i>(IP 67 available)</i>		
CRI (Ra)	90+		
Colour Binning Step	3 SCDM <i>(2 SCDM available)</i>		
Operating Temperature	-20°C ~ +50°C		

Product Dimensions: *(Units in mm)*

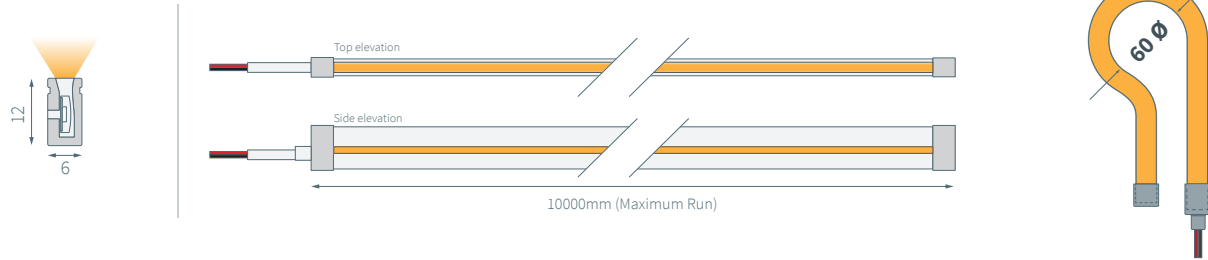

End Cap:

Standard End Cap

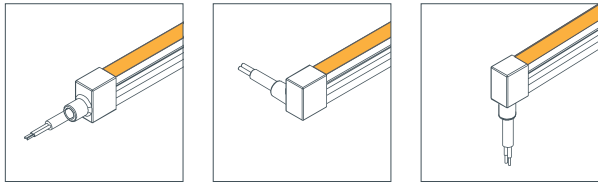


In-Line
U-NEON-0612-SEC-IL

Side Exit
U-NEON-0612-SEC-SE

Bottom Exit
U-NEON-0612-SEC-BE

Moulded End Cap

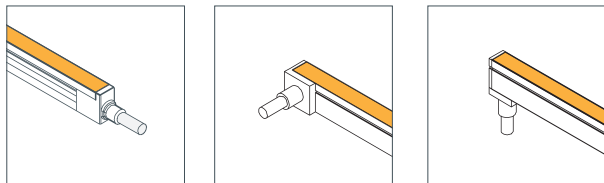


In-Line
U-NEON-0612-MEC-IL

Side Exit
U-NEON-0612-MEC-SE

Bottom Exit
U-NEON-1612-MEC-BE

Injection Moulded End Cap

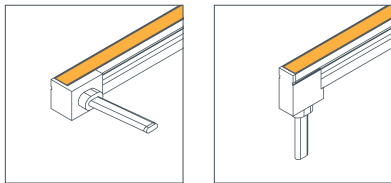

Side Exit
U-NEON-0612-IMEC-SE

Bottom Exit
U-NEON-0612-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-0612-ALP1M


Aluminium profile - 2M
U-NEON-0612-ALP1M

Brackets



Bracket
U-NEON-0612-BRK

Flexible Track

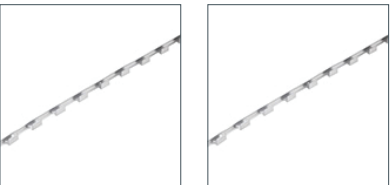

Flexible Track - 0.5m
U-NEON-0612-FT

Flexible Track - 1m
U-NEON-0612-FT

Polar Curve / Photometric Data:

