


U-NEON-1018-SB-14-RGB

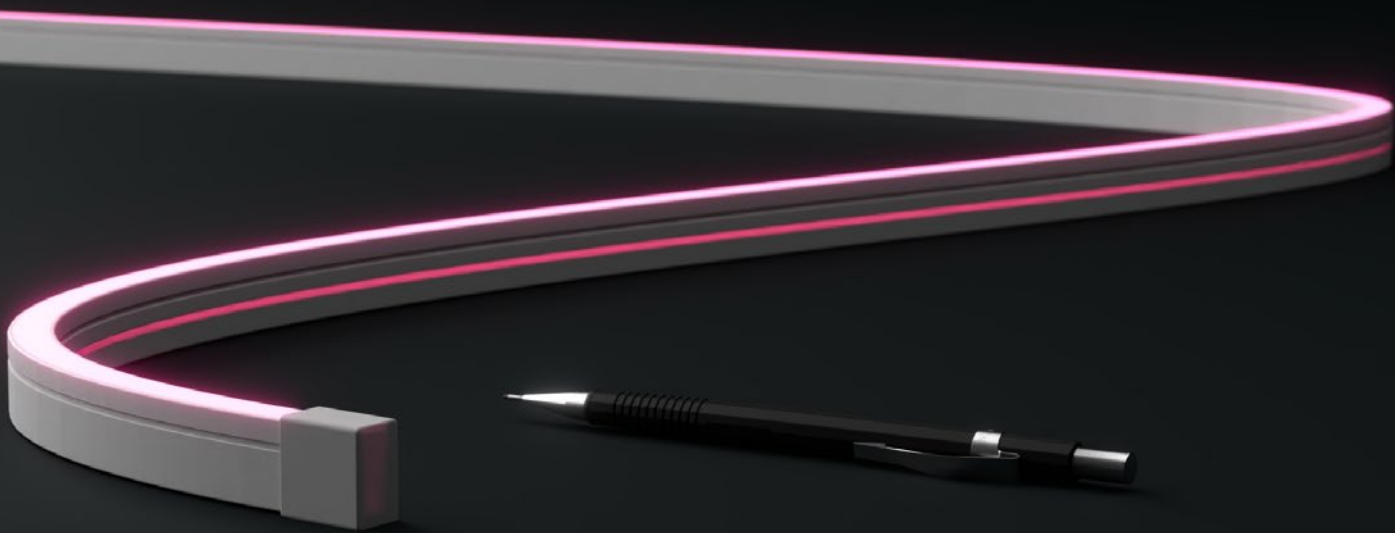


Product Specifications:

Product Range	Neon Flex
LED Strip Type	RGB
LED Pitch	16.7 mm
LED's per metre	60
LED Cut Point	50 mm
Dimensions	10 mm x 18 mm x 5.05 m (Reel length)
Colour Temperature	-
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: (Based on 1000mm)


Voltage	24 V		
Power Consumption	14.4 W		
Power Split	Red	Green	Blue
	4.8 W	4.8 W	4.8 W
Lumen Output	200 lm		
Lumen Split	Red	Green	Blue
	36 lm	100 lm	22 lm
Lumen Efficiency	14 lm / W		
Maximum Continuous Run (Powered from one end)	5 m		
IP Rating	IP 65 (IP 67 available)		
CRI (Ra)	90+		
Colour Binning Step	3 SCDM (2 SCDM available)		
Operating Temperature	-20°C ~ +50°C		

Product Dimensions: (Units in mm)

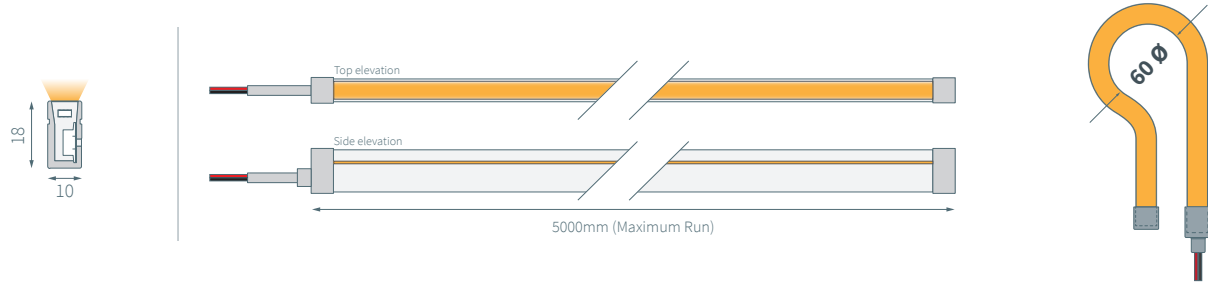

End Cap:

Standard End Cap

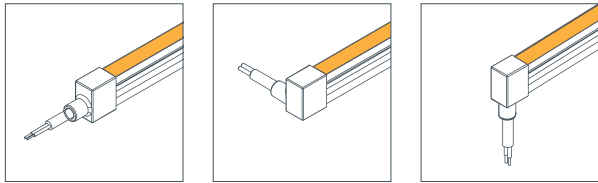


In-Line
U-NEON-1018-SEC-IL

Side Exit
U-NEON-1018-SEC-SE

Bottom Exit
U-NEON-1018-SEC-BE

Moulded End Cap

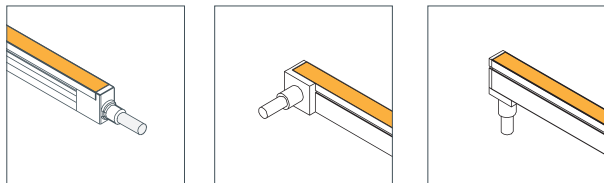


In-Line
U-NEON-1018-MEC-IL

Side Exit
U-NEON-1018-MEC-SE

Bottom Exit
U-NEON-1018-MEC-BE

Injection Moulded End Cap

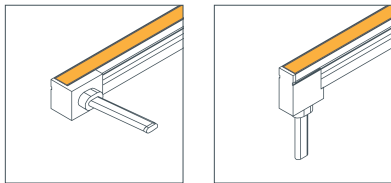

Side Exit
U-NEON-1018-IMEC-SE

Bottom Exit
U-NEON-1018-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1018-ALP1M


Aluminium profile - 2M
U-NEON-1018-ALP1M

Brackets



Bracket
U-NEON-1018-BRK

Flexible Track

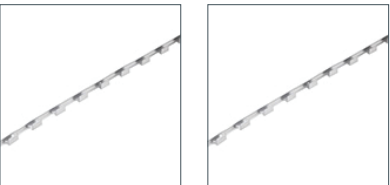

Flexible Track - 0.5m
U-NEON-1018-FT

Flexible Track - 1m
U-NEON-1018-FT

Polar Curve / Photometric Data:

