


U-NEON-1018-SB-14-RGBW

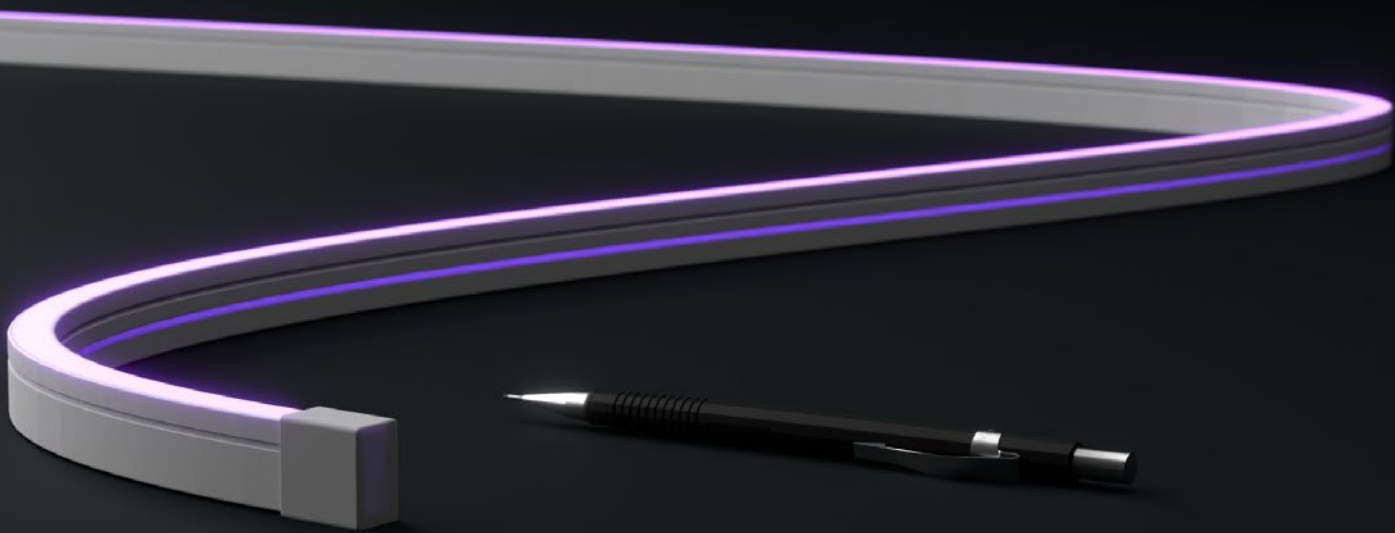


Product Specifications:

Product Range	Neon Flex
LED Strip Type	RGBW
LED Pitch	16.7 mm
LED's per metre	60
LED Cut Point	50 mm
Dimensions	10 mm x 18 mm x 5.05 m (Reel length)
Colour Temperature	RGBW (6000 K)
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: (Based on 1000mm)


Voltage	24 V			
Power Consumption	14.4 W			
Power Split	Red	Green	Blue	White (6000K)
	3.6 W	3.6 W	3.6 W	3.6 W
Lumen Output	380 lm			
Lumen Split	Red	Green	Blue	White (6000K)
	60 lm	120 lm	40 lm	160 lm
Lumen Efficiency	26 lm / W			
Maximum Continuous Run (Powered from one end)	5 m			
IP Rating	IP 65 (IP 67 available)			
CRI (Ra)	80+			
Colour Binning Step	3 SCDM (2 SCDM available)			
Operating Temperature	-20°C ~ +50°C			

Product Dimensions: (Units in mm)

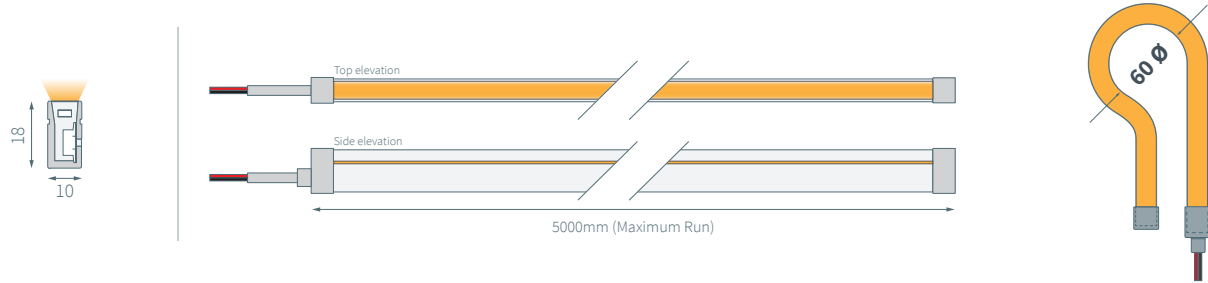

End Cap:

Standard End Cap

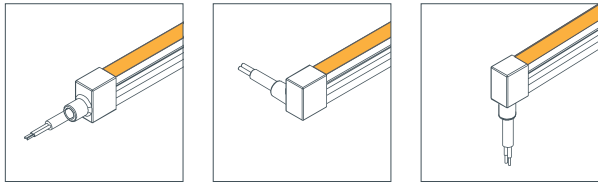


In-Line
U-NEON-1018-SEC-IL

Side Exit
U-NEON-1018-SEC-SE

Bottom Exit
U-NEON-1018-SEC-BE

Moulded End Cap

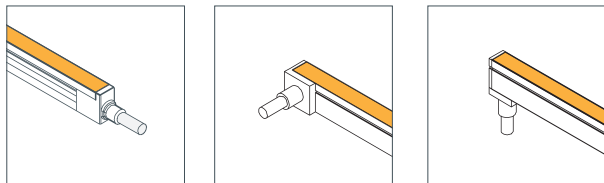


In-Line
U-NEON-1018-MEC-IL

Side Exit
U-NEON-1018-MEC-SE

Bottom Exit
U-NEON-1018-MEC-BE

Injection Moulded End Cap

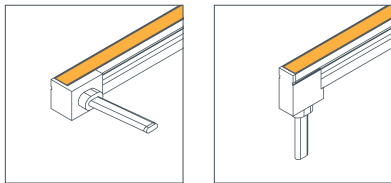

Side Exit
U-NEON-1018-IMEC-SE

Bottom Exit
U-NEON-1018-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1018-ALP1M


Aluminium profile - 2M
U-NEON-1018-ALP1M

Brackets



Bracket
U-NEON-1018-BRK

Flexible Track

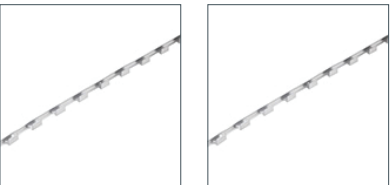

Flexible Track - 0.5m
U-NEON-1018-FT

Flexible Track - 1m
U-NEON-1018-FT

Polar Curve / Photometric Data:

