


U-NEON-1018-SB-19-WN

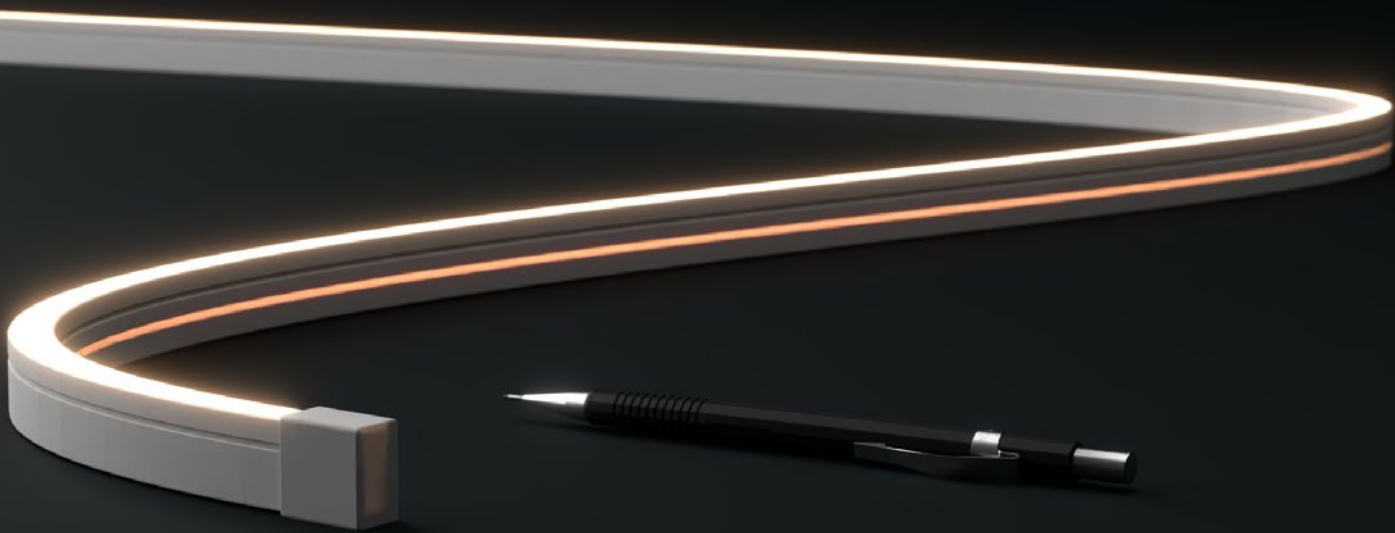


Product Specifications:

Product Range	Neon Flex
LED Strip Type	Colour Tuneable White
LED Pitch	4.16 mm
LED's per metre	240
LED Cut Point	50 mm
Dimensions	10 mm x 18 mm x 5.05 m <i>(Reel length)</i>
Colour Temperature	2200 K - 6500 K
Lifetime	upto 35000 hours
Mounting Method	See product accessories

Product Performance: *(Based on 1000mm)*


Voltage	24 V	
Power Consumption	19.2 W	
Power Split	Warm White	Cool White
	9.6 W	9.6 W
Lumen Output	730 lm	
Lumen Split	Warm White (2200K)	Cool White (6500K)
	350 lm	380 lm
Lumen Efficiency	38 lm / W	
Maximum Continuous Run <i>(Powered from one end)</i>	5 m	
IP Rating	IP 65 <i>(IP 67 available)</i>	
CRI (Ra)	90+	
Colour Binning Step	3 SCDM <i>(2 SCDM available)</i>	
Operating Temperature	-20°C ~ +50°C	

Product Dimensions: *(Units in mm)*

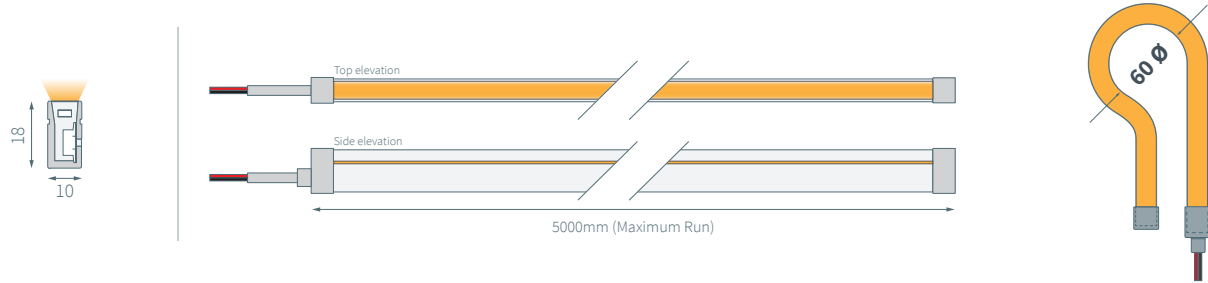

End Cap:

Standard End Cap

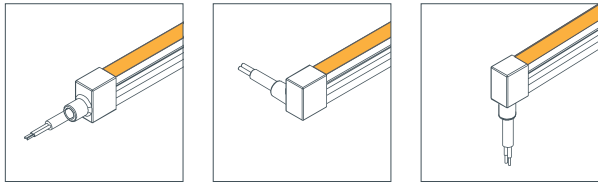


In-Line
U-NEON-1018-SEC-IL

Side Exit
U-NEON-1018-SEC-SE

Bottom Exit
U-NEON-1018-SEC-BE

Moulded End Cap

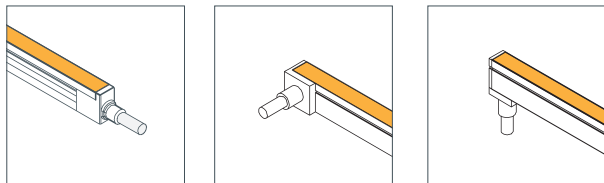


In-Line
U-NEON-1018-MEC-IL

Side Exit
U-NEON-1018-MEC-SE

Bottom Exit
U-NEON-1018-MEC-BE

Injection Moulded End Cap

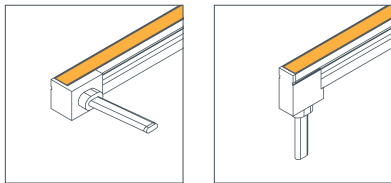

Side Exit
U-NEON-1018-IMEC-SE

Bottom Exit
U-NEON-1018-IMEC-BE

Product Accessories:

Aluminium Profile



Aluminium profile - 1M
U-NEON-1018-ALP1M


Aluminium profile - 2M
U-NEON-1018-ALP1M

Brackets



Bracket
U-NEON-1018-BRK

Flexible Track

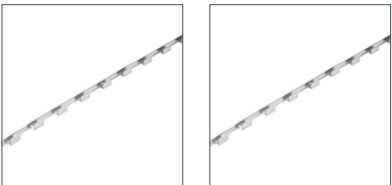

Flexible Track - 0.5m
U-NEON-1018-FT

Flexible Track - 1m
U-NEON-1018-FT

Polar Curve / Photometric Data:

